# **Communications & Power Industries Magnetron**



The VMS1610 is a coaxial magnetron delivering high peak and average RF power for use in various radar transmitters.

The VMS1610 will mount directly into new and existing sockets and can be operated under various pulse and input conditions to accommodate wide ranging operating requirements. In addition to high power, the VMS1610 provides excellent frequency stability, low jitter and long life.

## FEATURES:

- Frequency 2.7 2.9 GHz
- Peak power output 1.0 MW
- Duty cycle .0012
- Air cooled
- Mechanically tunable

## BENEFITS:

- Long life
- Exceptional frequency stability

### **APPLICATIONS:**

- Weather radar
- Air traffic control



# **CPI S-Band 1 MW Coaxial Magnetron: VMS1610**

Electrical Specifications	
2.7 – 2.9 GHz	
1 MW	
1.1 kW	
37.5 – 39.5 kV	
60 A	
66 mA	
2.0 μS	
0.0011	
10 V	
19 A	
480 S	
1.5:1	

• ••

.


. •

#### Mechanical and Environmental Specifications

opeemeations	
Cooling	Forced air
Maximum body temperature	110°C
Mounting position	Any
Support	Mounting flange
Coupling	Mates with UG585A/U choke flange modified for clearance holes
Tuning	150 turns
Weight	75 lbs. (34.02 kg)

With a history of producing high quality products, we can help your with magnetron.

#### Contact us at BMDMarketing@cpii.com or call us at +1 978-922-6000.

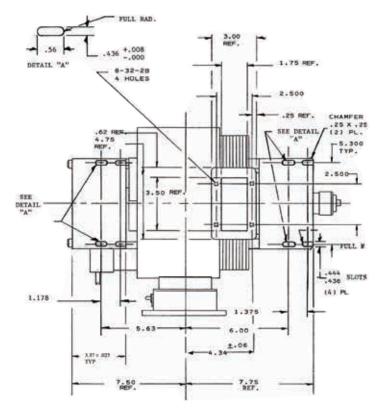



6.46

**Beverly Microwave** Division 150 Sohier Road Beverly, Massachusetts USA 01915


tel

fax

+1 978-922-6000 email BMDMarketing@cpii.com +1 978-922-8914 web www.cpii.com

For more detailed information, please refer to the corresponding CPI technical description if one has been published, or contact CPI. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.

©2020 Communications & Power Industries LLC. Company proprietary: use and reproduction is strictly prohibited without written authorization from CPI.

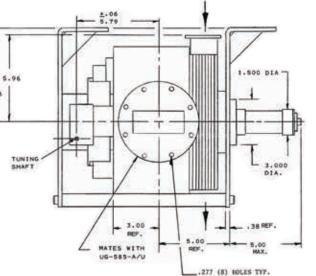

AIR FLOW