


# 750W Outdoor TWT Medium Power Amplifier for Satellite Communications

**Ku-Band**

## The VZU-6997V Series

750 watt TWT Medium Power Amplifier — high efficiency in an environmentally sealed compact package designed for outdoor operation

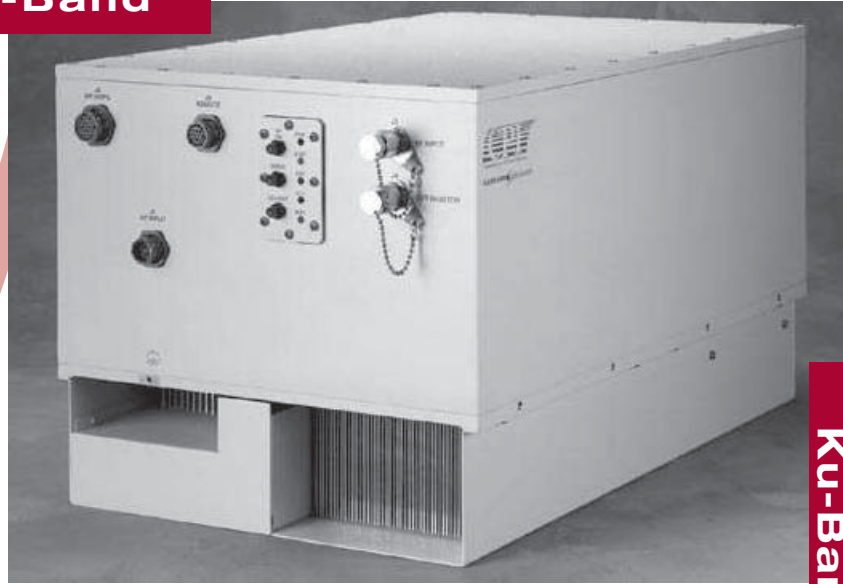

### Plays in the Rain

Provides 750 watts of power in a rugged and compact weatherproof package, digital ready, for wideband, single- and multi-carrier satellite service in the 13.75 - 14.50 (VZU-6997V7) or 12.75 - 14.50 GHz (VZU-6997VA) frequency band. Ideal for transportable and fixed earth station applications.

### Cost Effective and Efficient

Mounting at the antenna improves performance through minimized cable losses and saves cost in system design. Employs a high efficiency, dual-depressed collector helix traveling wave tube, reducing operating costs.

### Reliable

Designed and built to survive in extremely adverse environmental conditions and features increased cooling margin for longer life.

### Simple to Operate

User-friendly microprocessor-controlled logic with integrated RS422/485 computer interface. Digital metering, pin diode attenuation and optional integrated linearizer for improved intermodulation performance.

### Easy to Maintain

Modular design and built-in fault diagnostic capability via remote monitor and control.

### Global Applications

Meets International Safety Standard EN-60215, Electromagnetic Compatibility 2004/108/EC and Harmonic Standard EN-61000-3-2 to satisfy worldwide requirements.

### Worldwide Support

Backed by over three decades of satellite communications experience, and CPI's worldwide 24-hour customer support network that includes sixteen regional factory service centers.

**satcom**  **division**

811 Hansen Way  
P.O. Box 51625, Palo Alto, CA 94303

**tel:** +1 (650) 846-3803  
**fax:** +1 (650) 424-1744

**e-mail:** [satcommarketing@cpii.com](mailto:satcommarketing@cpii.com)  
[www.cpii.com/satcom](http://www.cpii.com/satcom)

**Ku-Band**

**750W Outdoor TWT Medium Power Amplifier**

## SPECIFICATIONS, VZU-6997V Series

### Electrical

Frequency	13.75 to 14.50 GHz (VZU-6997V7) or 12.75 to 14.50 GHz (VZU-6997VA)
Output Power	
TWT	750 W min. (58.75 dBm)
Flange	650 W min. (58.13 dBm)
Bandwidth	750 MHz or 1750 MHz
Gain	70 dB min. at rated power 75 dB min. at small signal
RF Level Adjust Range	0 to 30 dB typ.
Gain Stability	
At constant drive & temp.	±0.25 dB/24hr max. (after 30 min. warmup)
Over temp., constant drive (any frequency)	±1.0 dB over oper. temp. range (typical), ±0.75 dB over ±10°C (typical)
Small Signal Gain Slope	±0.02 dB/MHz max.
Small Signal Gain Variation	
Across any 80 MHz band	1.0 dB pk-pk max.
Across the 750 MHz band	3.5 dB pk-pk max. (4.5 dB w/ linearizer)
Across the 1750 MHz band	4.5 dB pk-pk max. (5.5 dB w/ linearizer)
Input VSWR	1.3:1 max.
Output VSWR	1.3:1 max.
Load VSWR	
Continuous operation	2.0:1
Full spec compliance	1.5:1
Operation without damage	Any value
Residual AM, max.	-50 dBc below 10 kHz -20 [1.5 +log F(kHz)] dBc, 10 kHz to 500 kHz -85 dBc above 500 kHz
Phase Noise	
IESS Phase Noise Profile	12 dB below mask
AC fundamentals	-36 dBc
Sum of spurs (370 Hz to 1 MHz)	-47 dBc
AM/PM Conversion	2.5°/dB max. for a single-carrier at 8 dB below rated power (at 3 dB backoff with optional linearizer)
Harmonic Output	-60 dBc at rated power, second and third harmonics
Noise and Spurious	<-130 dBW/4 kHz, below 12.7 GHz (below 11.7 GHz w/ 12.75 GHz config.) <-65 dBW/4 kHz, passband to 18.0 GHz (-60 dBW/4 kHz w/ linearizer) <-105 dBW/4 kHz, 18.0 to 26.0 GHz <-125 dBW/4 kHz, 26.0 to 40.0 GHz

### Electrical (continued)

Intermodulation	-24 dBc or better with two equal carriers at total output power level 7 dB below rated single-carrier output (at 3 dB below rated with with optional linearizer)
Group Delay	0.01 ns/MHz linear max. (in any 80 MHz band) 0.001 ns/MHz sq. parabolic max. 0.5 ns pk-pk ripple max.
Primary Power	
Voltage	Single phase, 200-240 VAC ±10%
Frequency	47-63 Hz
Power Consumption	2.3 kVA typ. 2.6 kVA max.
Power Factor	0.95 min.
Inrush Current	200% max.

### Environmental (Operating)

Ambient Temperature	-40°C to +55°C operating, including solar loading; -40°C to +75°C non-operating
Relative Humidity	100% condensing
Altitude	10,000 ft. with standard adiabatic derating of 2°C/1000 ft., operating; 50,000 ft., non-operating
Shock and Vibration	20 G peak, 11 msec, 1/2 sine; 2.1 G rms, 5 to 500 Hz.
Acoustic Noise	68 dBA (as measured at 3 ft.)
Heat Dissipation	2000 W max.

### Mechanical

Cooling (TWT)	Forced air with integral blower
RF Input Connection	Type N Female
RF Output Connection	WR-75 waveguide flange, grooved, threaded UNC 2B 6-32
RF Output Monitor	Type N female
Dimensions (W x H x D)	14.5 x 13.1 x 24 in. (368 x 333 x 610 mm)
Weight	82 lbs (37.3 kg) typ.

### OPTIONS:

- *Integral Linearizer*
- *Remote Control Panel*
- *Redundant and Hybrid Power Combined Systems*
- *Integrated 1:1 Switch Control and Drive*
- *External Receive Band Reject Filter (Increases loss by a minimum of 50 dB up to 13.5 GHz for 13.75 GHz HPA, or up to 11.7 GHz with 12.75 HPA)*
- *L-Band Block Up Converter (BUC) --- for specifications refer to TD-104.*



For more detailed information, please refer to the corresponding CPI Technical Description.

**Note:** Specifications may change without notice as a result of additional data or product refinement.

Please contact CPI before using this information for system design.



Communications & Power Industries

