Communications & Power Industries Helix Traveling Wave Tube



Custom configurations are also available. These variations in the performance and configuration include:

• mechanical configurations

VTK-6193D4

- electrical and RF connections
- dual-stage depressed collector

Frequency (GHz) Power output (min) 18.0 - 26.5 40 W

FEATURES:

- 40 W CW and pulsed
- 18.0 26.5 GHz
- Coaxial input
- Waveguide output
- PPM focusing
- Weight: 7 lbs. max
- Conduction cooled
- Any mounting position

BENEFITS:

- High efficiency
 - Less prime power required (due to multiple stage collectors)
- PPM focusing

APPLICATIONS:


- Satellite uplinks
- Communications
- Instrumentation
- DBS (Direct Broadcast System)

Typical Operating Parameters

-	Minimum	Maximum	Typical	Units
Filament voltage	6.0	6.6	6.3	Vdc
Filament current	0.8	1.5	1.1	Α
Helix voltage	11.5	13.2	12.6	kVdc
Helix current		4.0		mAdc
Beam current	60	110	85	mAdc
Focus voltage ON	-50	-2	-45	V
Focus voltage OFF	-1000	-800	-850	V
Collector voltage	41% of Ew	49% of Ew	45% of Ew	kVdc
Collector current		110	85	mAdc
Anode voltage	+0	+500	+200	V
Anode current		1.0	0	mA
Cathode warm-up time	5.0		5.0	minutes
Prime power		675		W
Load VSWR		1.7:1	1.25	VSWR



CPI CW Helix Traveling Wave Tube: VTK-6193D4X

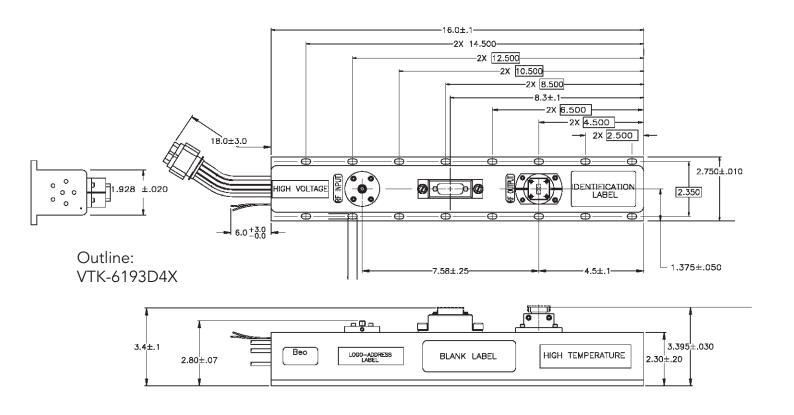

With a history of producing high quality products, we can help you with your Helix TWT. Contact us at MPPMarketing@cpii.com or call us at +1 650-846-2800.

The data should be used for basic information only. Formal, controlled specifications may be obtained from CPI for use in equipment design.



Microwave Power Products Division 811 Hansen Way Palo Alto, California USA 94304 tel +1 650-846-2800 email MPPMarketing@cpii.com web www.cpii.com/MPP For more detailed information, please refer to the corresponding CPI technical description if one has been published, or contact CPI. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.

©2020 Communications & Power Industries LLC. Company proprietary: use and reproduction is strictly prohibited without written authorization from CPI.