


Communications & Power Industries Helix Traveling Wave Tube

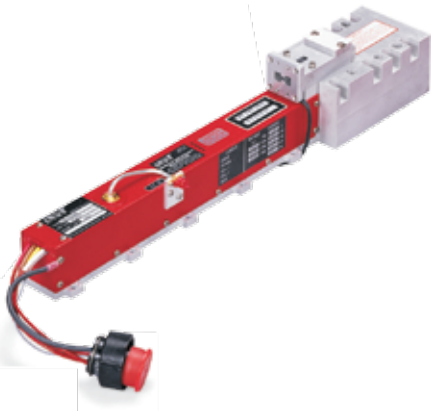

Custom configurations are also available. These variations in the performance and configuration include:

- mechanical configurations
- electrical and RF connections
- dual-stage depressed collector

	FREQUENCY (GHZ)	POWER OUTPUT (MIN)
VTM-6932M4B	8.0 - 18.0	320W

FEATURES:

- 320 Watt
- 8.0 - 18.0 GHz
- PPM Focused
- Coaxial Input
- Waveguide Output
- Weight: 9 lbs. max.
- Conduction Cooled

BENEFITS:

- High efficiency
 - Less prime power required (due to multiple stage collectors)
- PPM focusing


APPLICATIONS:

- Satellite uplinks
- Communications
- Instrumentation
- DBS (Direct Broadcast System)

TYPICAL OPERATING PARAMETERS

	Minimum	Maximum	Typical	Units
Heater Voltage:	6.0	6.5	---	Vdc
Heater Surge Current:	---	5.0	---	Adc
Helix Voltage:	9.9	10.8	---	kVdc
Helix Current:	---	15.0	---	mAdc
Collector Voltage 1:	.48 Ew	.52 Ew	---	Vdc
Collector Voltage 2:	.30 Ew	.34 Ew	---	Vdc
Cathode Current:	---	350	---	mAdc
Heater Warm-up Time:	3.0	---	---	Minutes
Drive Power:	---	200	---	mW
Load VSWR:	---	2.5:1	---	VSWR

CPI CW Helix Traveling Wave Tube: VTM-6392M4B

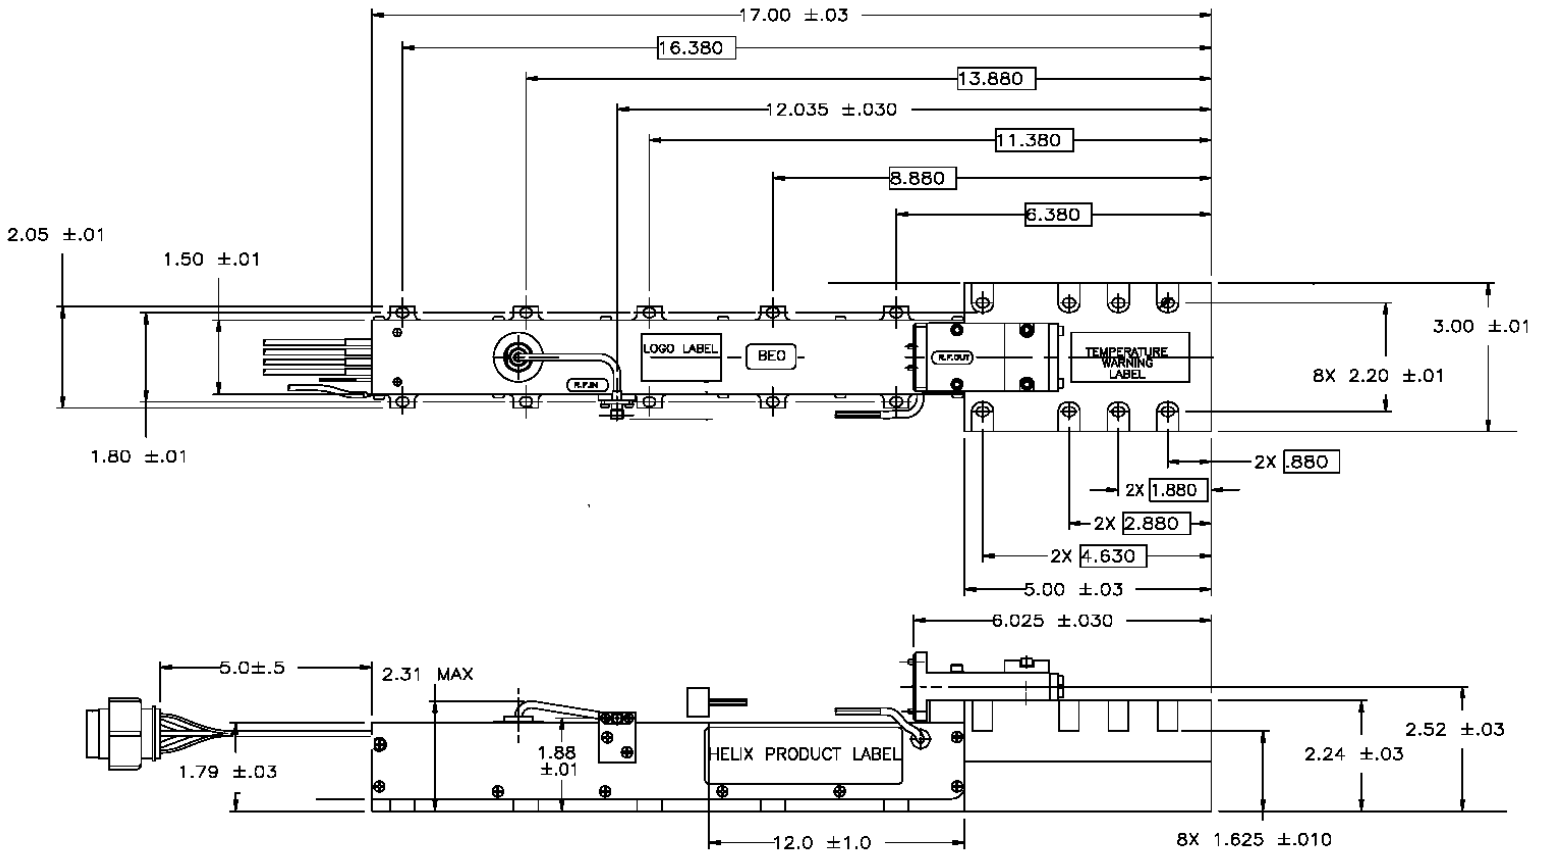

**Microwave Power
Products Division**
tel: +1 650-846-2800
email: MPPmarketing@cpii.com
web: www.cpii.com/mpp

For more detailed information, please refer to the corresponding CPI technical description if one has been published, or contact CPI. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.

©2020 Communications & Power Industries LLC. Company proprietary; use and reproduction is strictly prohibited without written authorization from CPI.