

Communications & Power Industries Helix Traveling Wave Tube



Custom configurations are also available. These variations in the performance and configuration include:

- mechanical configurations
- electrical and RF connections
- dual-stage depressed collector

	Frequency (GHz)	Power output (min)
VTU-6293D2A	13.75 - 14.50	400 W

FEATURES:

- 400 W
- 13.75 - 14.50 GHz
- Coaxial input
- Waveguide output
- Weight: 6 lbs. max
- Conduction cooled
- Dual-stage collector

BENEFITS:

- High efficiency
 - Less prime power required (due to multiple stage collectors)
- PPM focusing


APPLICATIONS:

- Satellite uplinks
- Communications
- Instrumentation
- DBS (Direct Broadcast System)

Typical Operating Parameters

	Minimum	Maximum	Typical	Units
Heater voltage	6.2	6.4	6.3	Vdc
Heater surge current	1.0	1.8	1.4	A
Helix voltage	8.2	9.0	8.8	kVdc
Helix current	---	8.0	4.0	mAdc
Collector voltage 1	49.0	51.0	50.0	%
Collector current 1	---	150	10 dc, 120 rf	mAdc
Collector voltage 2	31.0	33.0	32.0	%
Collector current 2	---	300	280 dc, 150 rf	mAdc
Cathode warm-up time	3.0	---	---	minutes
Drive power	---	10	---	dBm
Prime power	---	1100	1050	W
Thermal dissipation	---	850	---	W
Load VSWR	---	1.5:1	---	VSWR

CPI CW Helix Traveling Wave Tube: VTU-6392D2A

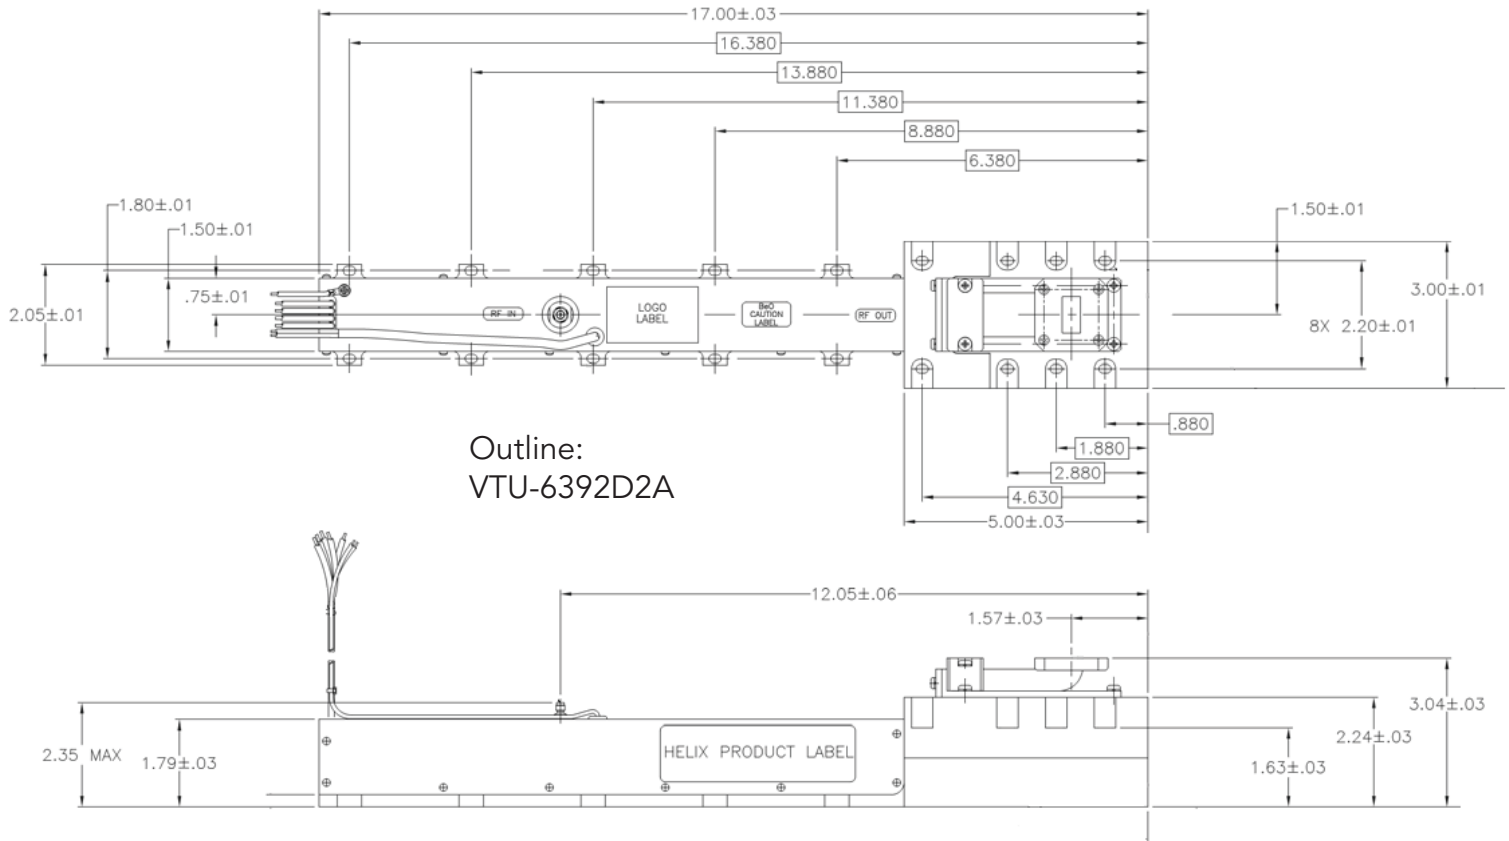

Outline:
VTU-6392D2A

With a history of producing high quality products, we can help you with your Helix TWT.
Contact us at MPPMarketing@cpii.com or call us at +1 650-846-2800.

The data should be used for basic information only. Formal, controlled specifications may be obtained from CPI for use in equipment design.



**Microwave Power
Products Division**
811 Hansen Way
Palo Alto, California
USA 94304

tel +1 650-846-2800
 email MPPMarketing@cpii.com
 web www.cpii.com/MPP

For more detailed information, please refer to the corresponding CPI technical description if one has been published, or contact CPI. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.

©2020 Communications & Power Industries LLC. Company proprietary; use and reproduction is strictly prohibited without written authorization from CPI.