

Built for Satellite Communications Uplink Applications


Provides 750 watts of power in a 5 rack unit package, digital ready, for wideband, satellite service within the 17.3 to 18.4 GHz frequency range.

Touchscreen Graphical Interface

State of the art touchscreen interface with both amplifier and/or system level control capabilities. Includes fault logs, parameter trending and scopescreen for monitoring performance. Internal switch control eliminates need for external controllers.

Easy to Maintain

Modular design and built-in fault diagnostic capability with convenient and clearly visible indicators for easy maintainability in the field. A USB port is available for uploading new firmware and system configurations, and downloading logs and system configurations for cloning to other units.

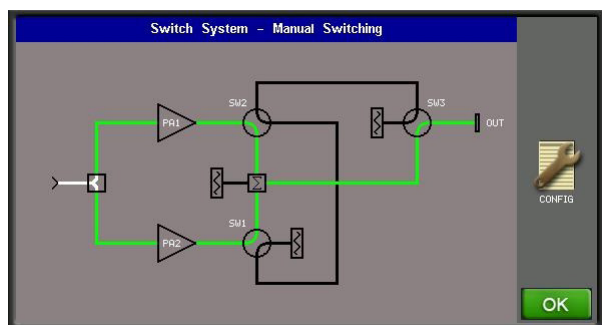

Touchscreen TWTA Sample Redundancy System Schematic Display; Various Configurations Available



CPI 750 W DBS-band TWTA, Model T5DI

OPTIONS:

- Remote control panel
- Redundant and hybrid power combined sub-systems
- Integral block upconverter (BUC): Contact CPI for specifications.
- LifeExtender/LifePredictor technology to extend TWT lifespan
- Uplink Power Control

FEATURES:

- Touchscreen user interface
- Ethernet interface
- SNMP interface (v1, v2, or v3)
- Serial interface (compatible with CHPA)
- CAN-Bus architecture improves reliability and noise immunity

Quality Management
System - ISO 9001:2015



Meets Global Requirements

Meets International Safety Standard EN-60215, Electromagnetic Compatibility 2014/30/EU and Harmonic Standard EN-61000-3-2 to satisfy worldwide requirements. CE Marked.

Worldwide Support

CPI satcom amplifiers are backed by over 40 years of satellite communications experience, and CPI's global customer support network, including regional factory service centers located worldwide.

Specification	CPI Model T5DI std. band	CPI Model T5DI ext. band
Output Frequency	17.3 to 18.4 GHz	
Output Power (min.) TWT Saturated (P_{sat} , CW)	750 W (58.75 dBm) min. 630 W (58.00 dBm) min.	
Gain	70 dB min. at rated power, 80 dB max; 75 dB min. at small signal, 85 dB max.	
RF Level Adjust Range	0 to 30 dB typ. (via PIN diode attenuator), 0.1 dB steps	
Gain Stability Over temp, constant drive Over $\pm 10^{\circ}\text{C}$, constant drive	± 0.25 dB/24 hour max,max. at constant drive and temperature, after 30 minute warmup ± 2.5 dB pk-pk max. over operating temperature range, at 48 dBm output power 1.5 dB pk-pk max, at 48 dBm output power	
Small Signal Gain Slope	± 0.04 dB/MHz max. at 48 dBm output power	
Small Signal Gain Variation	1.0 dB pk-pk max. over any 80 MHz; 4.5 dB pk-pk max. over 1100 MHz	
Input/Output VSWR	1.3:1 max.	
Load VSWR	2.0:1 continuous operation; 1.5:1 for full spec. compliance; any value operation without damage	
Phase Noise	-12 dB IESS-308/309 phase noise profile; -50 dBc AC fundamental (50/60 Hz); -50 dBc sum of all spurs (370 Hz to 1 MHz)	
AM/PM Conversion	2.0°/dB typ. at 3 dB OBO for a single carrier	
Harmonic Output	-70 dBc at rated power, second and third harmonics	
Noise Density	<-150 dBW/4 kHz, 10.70 to 12.75 GHz; <-70 dBW/4 kHz passband	
NPR	-19 dBc at 4 dB OBO	
Intermodulation - with respect to each of two equal carriers 5 MHz apart	-26 dBc or better at 54.0 dBm	
Spectral Regrowth	-30 dBc at 1 symbol rate at 3 dB OBO, QPSK and OQPSK	
Group Delay	Over any 80 MHz: 0.01 ns/MHz linear max; 0.005 ns/MHz ² parabolic max; 0.5 ns pk-pk ripple max.	
Primary Power	Voltage: Single phase, 200-240 VAC $\pm 10\%$; Frequency: 47-63 Hz, 15 A max.	
Power Consumption	2.2 kVA typ. at P_{sat} ; 2.3 kVA max; 1.8 kVA typ. at P_{LIN}	
Power Factor	0.95 min; 0.99 typ.	
Inrush Current	200% max.	
Ambient Temperature	-10°C to +55°C operating, -54°C to +71°C non-operating	
Relative Humidity	95% non-condensing	
Altitude	10,000 ft. with standard adiabatic derating of 2°C/1000 ft. operating; 50,000 ft. non-operating	
Shock and Vibration	Designed for normal transportation environment per section 514.4 MIL-STD-810G. Designed to withstand 20G at 11 ms (1/2 sine pulse in non-operating condition)	
Cooling	Forced Air with integral blower. Rear air intake and exhaust. Maximum external pressure loss allowable: 0.5" water column	
Connections	RF Input: Type SMA Female; RF output: WR-62G grooved waveguide flange; RF output monitor: Type SMA Female	
M&C Interface	RJ45 Ethernet, includes embedded GUI control; RS422/485, RS232 serial interface	
USB Port	Download/Upload software, logs	
Dimensions, W x H x D	19 x 8.75 x 24 inches (483 x 222 x 610 mm)	
Weight	85 lbs (38.6 kg) nom.	
Heat Dissipation	1,440 watts to duct; 360 watts to room	
Acoustic noise	68 dBA (as measured at 3 ft.) nom.	