

	SSPA Model SA52KOA	SSPA Model SB52KOA
ELECTRICAL SPECIFICATIONS		
RF Output Frequency	27.5 to 30.0 GHz or 29.0 to 31.0 GHz	27.5 to 30.0 GHz or 29.0 to 31.0 GHz (optional wide-band or multi-band BUCs available in switchable 1 GHz bands)
RF Input Frequency	27.5 to 30.0 GHz or 29.0 to 31.0 GHz	950 to 1950 MHz or 1000 to 2000 MHz
Spectral Regrowth (1)	at 100W (50 dBm), -25 dBc at 1.5 SR offset with 8PSK at 1Mb/second, 2/3 FEC (27.5 to 30.0 GHz)	
Spectral Regrowth (2)	at 80W (49 dBm), -25 dBc at 1.0 SR offset with QPSK at 5Mb/second, 1/2 FEC (29.0 to 31.0 GHz)	
Gain	63 dB min; 69 dB max	
Gain Stability over temp, constant drive over 24 hrs., constant temp	± 1.5 dB max. ±0.25 dB max	± 2.0 dB max. ±0.25 dB max
Gain Flatness	±1.75 dB max. full band; ±1.00 dB max. over any 45 MHz	
Small Signal Gain Slope	±0.04 dB/MHz max.	
Gain Adjustment Range	Up to 30 dB (0.1 dB steps)	
Input VSWR (50 Ω)	1.5:1 max.	
Output VSWR (WR28)	1.3:1 max.	
Load VSWR	1.7:1 max. continuous operation; 1.5:1 max. full spec	
Reference (MUX on IF)	N/A	10 MHz std; other options available
Phase Noise (External Reference)	N/A	-120 dBc/Hz at 10Hz -140 dBc/Hz at 100Hz -145 dBc/Hz at 1 kHz -150 dBc/hz at ≥10 kHz
Single Sideband Phase Noise	N/A	3 dB better than IESS 308/309 profile
AM/PM Conversion	2°/dB max. full spec.	
Spurious	-60 dBc max at Plin (excluding 2 MHz around carrier)	
Group Delay (per 80 MHz)	Linear: 0.03 ns / MHz; Parabolic: 0.003 ns/MHz ² ; Ripple: 1.0 ns pk-pk	
Noise Power Density	<-150 dBW/4 kHz under 20.2 GHz <-65 dBW/4 kHz, passband	
Prime Power	110 – 240 VAC ±10%	
Power Consumption	1200 VA max; 800 VA typical	
MECHANICAL SPECIFICATIONS		
Dimensions	W = 9.50 in; H = 8.1 in; L = 17.00 in (20.35 in with handles)	
Weight		
RF Input Connection	2.9 mm female	Type N female
RF Output Connection	WR34 grooved waveguide flange	
M&C Interface	RJ45 jack Multi-pin connector, see outline drawing	
RF Sample Output	2.92mm	
IF Sample Output	SMA female	



tel: +1 662 752 744
email: satcommarketing@cpii.com
web: www.cpii.com/satcom


For more detailed information, please refer to the corresponding CPI technical description if one has been published or contact CPI. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.

© 2023 Communications & Power Industries LLC. Company proprietary: use and reproduction is strictly prohibited without written authorization from CPI.

GaNLink™ 160 Watt Ka band SSPA/BUC Specification

	SSPA Model SA52KOA	SSPA Model SB52KOA
ENVIRONMENTAL SPECIFICATIONS		
Ambient Temperature		
Operating	-40°C to +60 °C	
Non-Operating	-55°C to +85 °C	
Relative Humidity	Up to 100% RH condensing	
Altitude	Operating: up to 10,000 feet (3048 m) above sea level, derated 2°C for every 1000 feet above sea level (305 m); Non-operating: up to 50,000 feet (50,000 m) above sea level	
Cooling	Integral forced air	
Shock and Vibration (operating)	Operating: per MIL-STD-810F: Method 516 and Method 514	
Shock and Vibration (non-operating in shipping container)	MIL-STD-810F516 (Transit Drop); MIL-STD-810F514 (Transportation and Operational Service)	
Weatherproofing	IP66	

Outline drawing for illustrative purposes

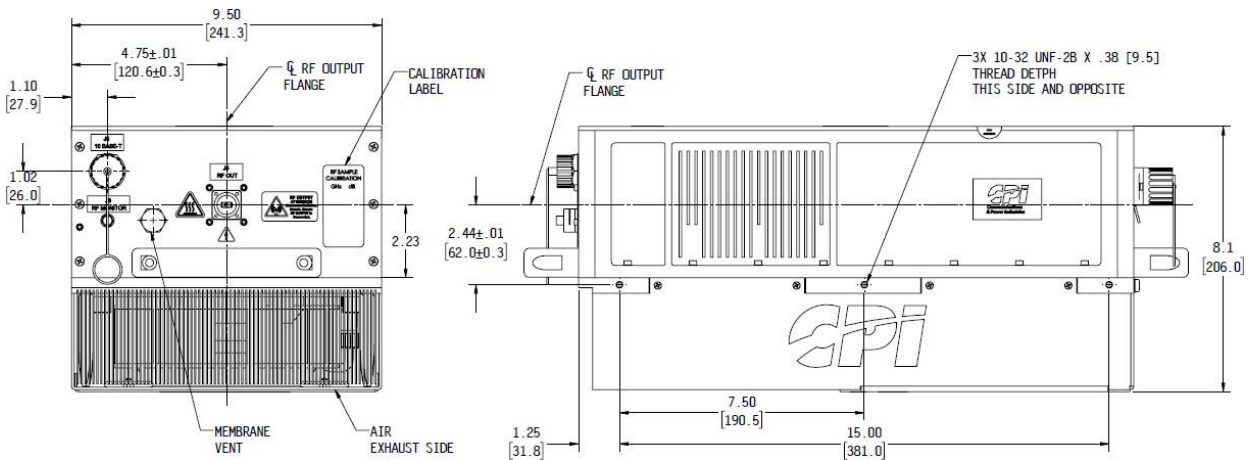

**Power Electronics:
Amplifier Products**
tel: +1 669-275-2744
email: satcommarketing@cpii.com
web: www.cpii.com/satcom

For more detailed information, please refer to the corresponding CPI technical description if one has been published or contact CPI. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.

© 2023 Communications & Power Industries LLC. Company proprietary: use and reproduction is strictly prohibited without written authorization from CPI.