
Communications & Power Industries Beverly Microwave Division Solid State Power Amplifier

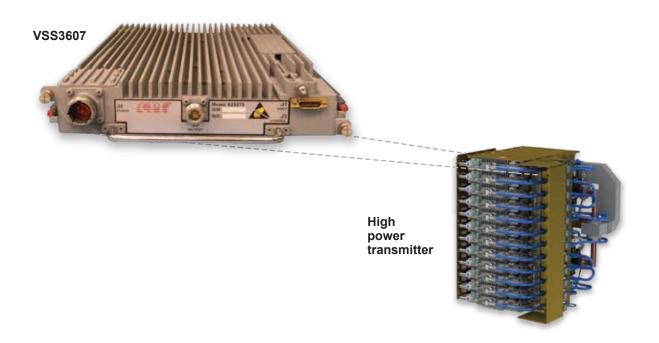

CPI-Built RF Power Modules

S-band Solid State Power Amplifiers produce high power and are compact with proven GaN transistor technology.

CPI's Solid State Power Amplifiers are rugged, highly-efficient and easy to maintain. The VSS3607 Solid State Power Amplifiers are used in military (ATC & Search) radar applications and cover the 2.7 – 2.9 GHz frequency band. GaN transistors are combined into 1.3 kW bricks which are air cooled. The 1.3 kW bricks can be power-combined using radial combiners and waveguide combiners for high power transmitters.

FEATURES:

- Frequency range: 2.7 2.9 GHz
- 1.3 kW pulsed modules
- High efficiency GaN transistors
- BIT and controls via EIA-422 remote connection
- Easily power combined for any power level
- Hermetically sealed for extreme environments

BENEFITS:

- Ruggedized design
- High efficiency
- Excellent pulse fidelity
- Excellent AM/PM, phase-noise, and spectral regrowth performance

APPLICATIONS:

- ATC radars
- Air surveillance radar




S-Band 1.3 kW Solid State Power Amplifier: VSS3607

Specifications

2.7 – 2.9 GHz
1.3 kW
1 to 100 µsec
0.5 dB
10%
1 dB
50 dB
1.5:1
1.5:1
-65 dBc
-165 dBm/Hz
-100 dBc into a 1 MHz
bandwidth
>140,000 hours
Compliant with customer
pulse shaping as required

Specifications


Prime Power		31 VDC @ 14 Amps
Ambient Temperature		-32C to +70C operating
Relative Humidity		100% non-condensing
Altitude	Operating	30,000 feet (9.14km)
	Non-operating	70,000 feet (21.34km)
Shock and Vibration		Ruggedized for harsh
		environments
Cooling		Forced air
RF Input	Connection	SMA male
RF Outpu	ıt Connection	Type N female
RF Output Monitor		Control connector
Dimensions (width)		9.5 in (24.13 mm)
Dimensions (height)		1.75 in (4.45 cm)
Dimensions (depth)		15.5 in (39.37 cm)
Weight		11 lbs. max. (4.99 kg)
Output Isolator		May be provided for VSWR
(optional)		protection.

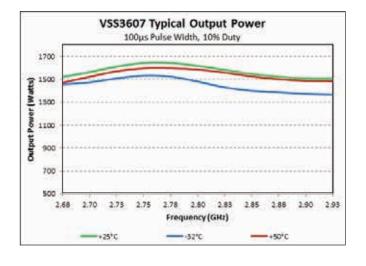

Peak RF Pulse Plots



10 µsec PW, 1 kHz PRF



100 µsec PW 1 kHz PRF 10 % Duty



Beverly Microwave tel
Division emai
150 Sohier Road fax
Beverly, Massachusetts web
USA 01915

tel +1 978-922-6000 email BMDMarketing@cpii.com fax +1 978-922-8914 web www.cpii.com

For more detailed information, please refer to the corresponding CPI technical description if one has been published, or contact CPI. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.

©2020 Communications & Power Industries LLC. Company proprietary: use and reproduction is strictly prohibited without written authorization from CPI.