Communications & Power Industries Helix Traveling Wave Tube



	Frequency (GHz)	Power output (min)
VTU-6397V1A	13.75 - 14.50	1250 W Peak 625 W Avg.
VTU-6397V1B	12.75 - 14.50	1250 W Peak 625 W Avg.
VTU-6397V1C	12.75 - 14.50	1250 W Peak 625 W Avg.
VTU-6397V1D	12.75 - 14.50	1250 W Peak 625 W Avg.

FEATURES:

- 1250 W Peak, 625 W Avg.
- 12.75 14.80 GHz
- Coaxial input
- Waveguide output
- Weight: 25 lbs. max
- Air cooled

BENEFITS:

- High efficiency
 - Less prime power required (due to multiple stage collectors)
- PPM focusing

APPLICATIONS:

- Satellite uplinks
- Communications
- Instrumentation
- DBS (Direct Broadcast System)

Custom configurations are also available. These variations in the performance and configuration include:


- mechanical configurations
- electrical and RF connections
- dual-stage depressed collector

Typical Operating Parameters


•	Minimum	Maximum	Typical	Units
Heater voltage	6.2	6.4	6.3	Vdc
Heater surge current	1.0	1.8	1.5	А
Helix voltage	14.3	15.3	14.8	kVdc
Helix current		10.0	3.0	mAdc
Collector voltage 1	51.0	53.0	52.0	%
Collector current 1		350 rf	50 dc; 250 rf	mAdc
Collector voltage 2	12.0	14.0	13.0	%
Collector current 2		580	550 dc; 300 rf	mAdc
Cathode warm-up time	3.0			minutes
Drive power		18.0	10.0	dBm
Prime power		2400	2150	W
Thermal temperature		1750	1550	W
Load VSWR		1.2:1		VSWR





CPI CW Helix Traveling Wave Tube: VTU-6397V1A, V1B, V1C, V1D

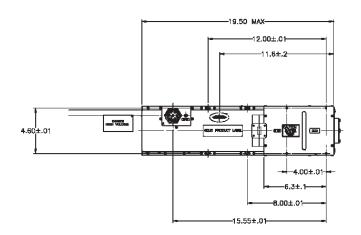

Outline: VTU-6397V1A, V1B, V1C, V1D



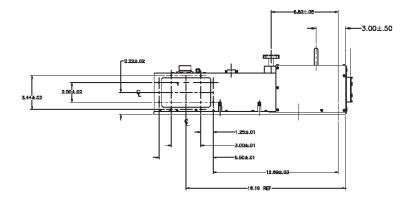



With a history of producing high quality products, we can help you with your Helix TWT. Contact us at MPPMarketing@cpii.com or call us at +1 650-846-2800.

The data should be used for basic information only. Formal, controlled specifications may be obtained from CPI for use in equipment design.



Microwave Power Products Division 811 Hansen Way Palo Alto, California USA 94304 tel +1 650-846-2800 email MPPMarketing@cpii.com web www.cpii.com/MPP For more detailed information, please refer to the corresponding CPI technical description if one has been published, or contact CPI. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.